

Levelling mount

Steel / Stainless Steel / Threaded stem, not adjustable

SPECIFICATION

Types

- Type **KS**: with plastic cap, gliding
- Type **KR**: with plastic cap, non-gliding

Version in Steel ST

- Tensile strength class 5.8
- zinc plated, blue passivated
- Hexagon nut ISO 4035, Steel zinc plated, blue passivated

Version in Stainless Steel NI

- AISI 303
- Hexagon nut ISO 4035, Stainless Steel AISI 304

Plastic caps:

Type KS

Technopolymer (Polyacetal POM)
white (natural colour) RAL 9001

Type KR

Elastomer (TPE)
73 shore A ≈, black

INFORMATION

Levelling mount GN 339 are used for applications in cases where no jointed link is required between foot and adjusting screw.

For this reason they offer the advantage of reduced height.


The gliding and/or the non-gliding protective cap is safely fixed in the foot.

TECHNICAL INFORMATION

- Elastomer characteristics (see page A32)
- Plastic characteristics (see page A2)
- Stainless Steel characteristics (see page A26)
- Strength values of screws (see page A20)

* Complete with type index of the Levelling mount

ST	NI
Steel	Stainless Steel

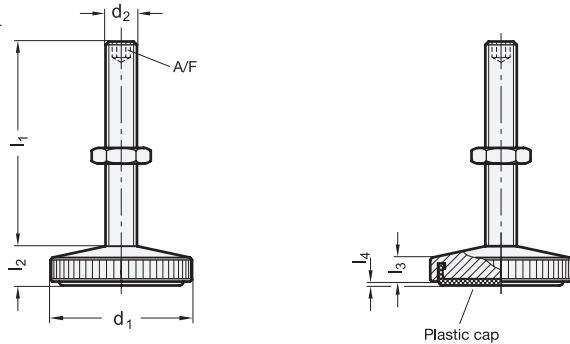

GN 339

Description	d1	d2	l1	l2 ≈	l3 ≈	l4	A/F	Static load in kN	⚖️
GN 339-29-M6-30-KR-*	29	M 6	30	8	5	0.4	3	6	30
GN 339-29-M6-45-KR-*	29	M 6	45	8	5	0.4	3	6	32
GN 339-29-M8-35-KR-*	29	M 8	35	8	5	0.4	4	13	37
GN 339-29-M8-55-KR-*	29	M 8	55	8	5	0.4	4	13	43
GN 339-36-M8-40-KR-*	36	M 8	40	9	6	0.5	4	13	56
GN 339-36-M8-65-KR-*	36	M 8	65	9	6	0.5	4	13	65
GN 339-36-M10-45-KR-*	36	M 10	45	9	6	0.5	5	18	70
GN 339-36-M10-70-KR-*	36	M 10	70	9	6	0.5	5	18	83
GN 339-29-M6-30-KS-*	29	M 6	30	8	5	1	3	6	34
GN 339-29-M6-45-KS-*	29	M 6	45	8	5	1	3	6	36
GN 339-29-M8-35-KS-*	29	M 8	35	8	5	1	4	13	41
GN 339-29-M8-55-KS-*	29	M 8	55	8	5	1	4	13	48
GN 339-36-M8-40-KS-*	36	M 8	40	9	6	1	4	13	64
GN 339-36-M8-65-KS-*	36	M 8	65	9	6	1	4	13	72
GN 339-36-M10-45-KS-*	36	M 10	45	9	6	1	5	18	78
GN 339-36-M10-70-KS-*	36	M 10	70	9	6	1	5	18	91

Weight type ST

