


TPC+a



Oil fill plugs with flat dipstick for push-fit



ELESA Original design

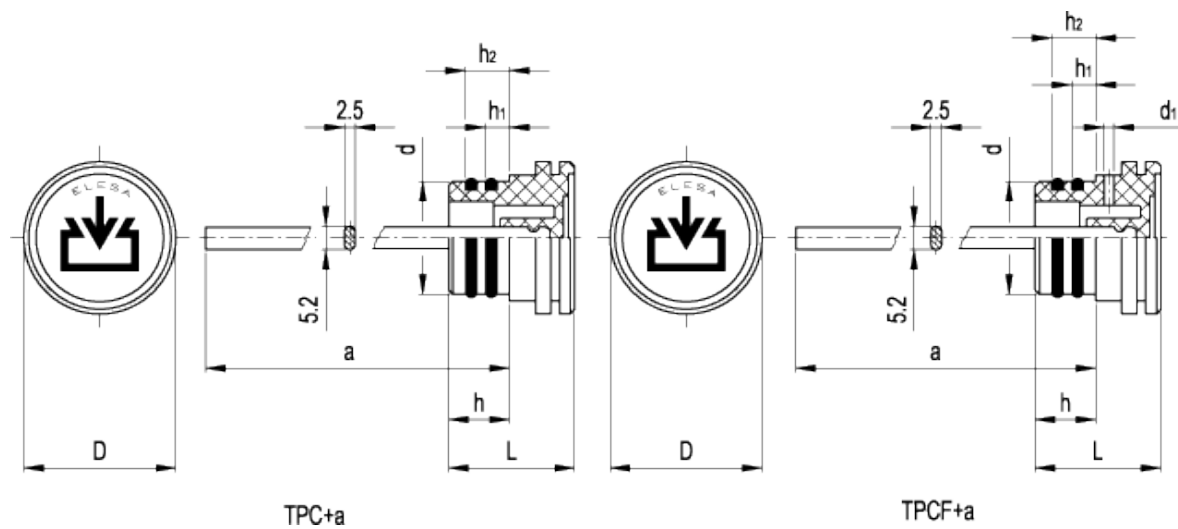

technical informations

Material

High-resilience polypropylene based (PP) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

- TPC+a: without side hole.
- TPCF+a: \varnothing 2 mm side breather hole.

Colour

Black, matte finish.

Packing rings

Two NBR synthetic rubber O-rings.

Flat dipstick

Phosphatised steel. On request and for sufficient quantities dipstick can be supplied in different lengths and/or complete with

MAX-MIN level lines.

Maximum continuous working temperature

100°C.

Graphic symbol "fill"

According to DIN regulations.

Standard Elements		Main dimensions							Weight
Code	Description	d	h	D	L	h ₁	h ₂	a	g
59865	TPC.20+a	20	14	30	29	6.5	10.5	188	27
59885	TPC.26+a	26	14	35	29.5	6.5	10.5	188	35

Standard Elements		Main dimensions							Weight	
Code	Description	d	h	D	L	h ₁	h ₂	d ₁	a	g
59905	TPCF.20+a	20	14	30	29	6.5	10.5	2	188	27
59925	TPCF.26+a	26	14	35	29.5	6.5	10.5	2	188	35



ELESA and GANTER models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.

STANDARD MACHINE ELEMENTS WORLDWIDE