





GN 129.5-NI

Hinges



INOX
Stainless Steel

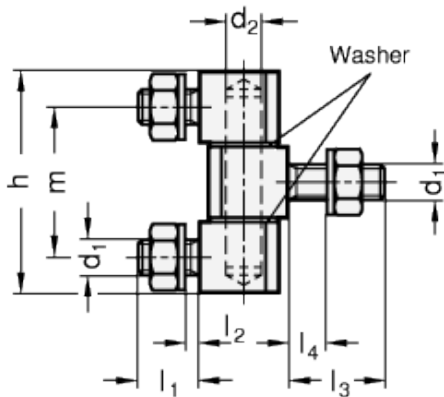

technical informations
Hinge body, pin, washer
AISI 303 Stainless Steel NI.

Hexagon nuts ISO 4032

AISI 304 Stainless Steel.

Serrated washer DIN 6797

For securing screws, AISI 304 Stainless Steel.

Standard version available

- Type D: consisting of three parts.

Features and applications

Stainless Steel-Hinges GN 129.5 are used for doors which are flush with the frame on the outside. Once assembled, they cannot be unhinged.
With the fixing from the inside, they are especially suitable for doors and trap doors which must not be detachable from the outside as an anti-tamper device

Standard Elements	Main dimensions										Weight
Description	s	b	d ₁	d ₂	h	l ₁	l ₂	l ₃	l _{4 max.}	m	g
GN 129.5-12-D-NI	12	15	M6	6	39.2	10	5	14	9	27.2	58
GN 129.5-16-D-NI	16	20	M8	8	49	14	8	22	16	33	134



STANDARD MACHINE ELEMENTS WORLDWIDE